hëndig

ELECTRONIC KITCHEN SCALE

INSTRUCTION MANUAL



Before using this product, please read this manual carefully and keep it for future reference. (the pictures are for reference only and be subject to the actual product.)

Features

1. High precision sensor.
2. LCD high-definition display
3. Automatic turn-off
4. Overload prompts
5. With unit switch
6. With peeling function and overload protection.
7. Can be used for charging or batteries, dual power supply mode

Basic Characteristic

- Product Name: Charging Digital Kitchen Scale
- Power Supply: 2*AAA batteries
- Range:5kg/10kg/15kg
- Accuracy: 1G
- Error range: 3%+1G

Instructions

1. Battery and Battery Installation

(2) Power supply using battery: After placing 2 AAA batteries, the scale will give priority to using the AAA battery to supply power to the electronic scale.

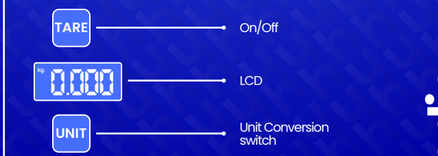

hëndig

Button Description

Z/T ON/OFF Tare /Clear switch
Unit Conversion Switch





ON/OFF

1. The button of the SWITCH can be used to start and shut down operation. It can be turned on by pressing the "switch" button lightly in the shutdown state and turn off by pressing the SWITCH button lightly 2-3s in the boot state.



Z/T

1. ZERO key, put the tray under the scale (if there is a tray)
2. Press the Return to Zero button to remove the weigh of the tray.
3. The scale can be aggravated and measured only after the display is returned to zero.



UNIT

1. This product has a variety of units for users to choose, press the "Unit" button to cycle selection.
2. As shown in Figure





Weighing Description

1. Please place the electronic scale on a hard horizontal surface and operate in an operating environment where strong winds cannot be blown (such as a fan).
2. Place the carrier tray on the scale body.
3. Press the SWITCH button to boot.
4. Wait for 0 to appear before you can start weighing, press the UNIT button to convert units.
5. Place the item on the weighing body (or on the carrier plate) for weighing, the LCD display weight.

5. Automatic shutdown

(Power saving mode) products factory preset in 3 minutes static situation automatic shutdown, can be the product shutdown time of 3 modes set to 3 minutes, 10 minutes, do not automatically shut down (need to press the key to turn off the shutdown).

Setup method

In the shutdown of the state, with one hand according to the unit key does not loosen the case, and then with the other use of the switch key to boot, after the boot display will display the current set shutdown time, and then can be the general unit key to modify the settings, modified after pressing the SWITCH button to confirm.

Precautions

1. 1. Before use, please place the product on a solid flat desktop operation, do not have strong winds blowing the electronic scales (such as fans), do not be placed on the cushion operation, and keep their feet on the desktop.
2. 2. Do not place this product in wet, high-heat and low-cold places to use.
3. 3. This product is a high-precision electronic products, please do not slap vigorously on the instrument, move to prevent drop damage.
4. 4. When the item is dirty, wipe clean with water. Do not use chemical agents and prevent the wate into the scale body from the bottom.
5. 5. if you don't use it for a long time, please take the batteries off, to prevent the corrosion of the electronic scale caused by the battery fluid leak.
6. 6. If the monitor displays the LO that it indicate the power is too low, please charge the electronic scale in time or replace the batteries. While charging the built-in lithium battery, please be sure to remove the batteries.
7. 7. When the monitor displays ERR, please remove that to avoid damage to the item.

FAQ

Did not turn on and it cannot connect the power.
You can check whether the product has the batteries or the batteries is loaded reverse. Charging products can be directly connected to the charging line charging test.
No return to zero.
You can take the batteries off and reinstall it. When the item reinstall the batteries, it can adjustment by itself. Or you can check it that whether the feet of the item are on a flat, hard desktop or nor.
The product has a digital instability after it has been zeroed.
If the first time to after the boot, you can press Clear 0 /Except Plan to clear zero. While it was happens repeatedly, you need to remove the batteries and reinstall it. you also can check it that whether the feet of the item are on a flat, hard desktop or nor.
After using a period of time, the display brightness drops
After a period of use of the product, the battery will be reduced, this time as long as there is no low power prompt character, the product can be used, However, you need to replace the battery as soon as possible or with the charging cable need to charge. To ensure that the product is fully charged.
Weighing is not correct enough, repeatedly called an item will appear different values.
This item is a measurement product and there will be a certain reasonable error range. It can be used normally as long as the error does not exceed the specification error range.

hëndig

ELECTRONIC KITCHEN SCALE

INSTRUCTION MANUAL



Before using this product, please read this manual carefully and keep it for future reference. (the pictures are for reference only and be subject to the actual product.)

Features

1. High precision sensor.
2. LCD high-definition display
3. Automatic turn-off
4. Overload prompts
5. With unit switch
6. With peeling function and overload protection.
7. Can be used for charging or batteries, dual power supply mode

Basic Characteristic

- Product Name: Charging Digital Kitchen Scale
- Power Supply: 2*AAA batteries
- Range:5kg/10kg/15kg
- Accuracy: 1G
- Error range: 3%+1G

Instructions

1. Battery and Battery Installation

(2) Power supply using battery: After placing 2 AAA batteries, the scale will give priority to using the AAA battery to supply power to the electronic scale.

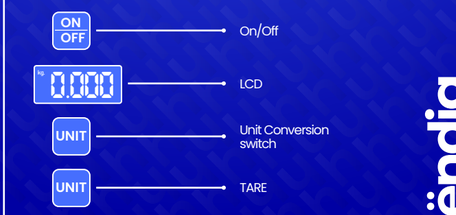

hëndig

Button Description

Z/T ON/OFF Tare /Clear switch
Unit Conversion Switch





ON/OFF

1. The button of the SWITCH can be used to start and shut down operation. It can be turned on by pressing the "switch" button lightly in the shutdown state and turn off by pressing the SWITCH button lightly 2-3s in the boot state.



Z/T

1. ZERO key, put the tray under the scale (if there is a tray)
2. Press the Return to Zero button to remove the weigh of the tray.
3. The scale can be aggravated and measured only after the display is returned to zero.



UNIT

1. This product has a variety of units for users to choose, press the "Unit" button to cycle selection.
2. As shown in Figure



Weighing Description

1. Please place the electronic scale on a hard horizontal surface and operate in an operating environment where strong winds cannot be blown (such as a fan).
2. Place the carrier tray on the scale body.
3. Press the SWITCH button to boot.
4. Wait for 0 to appear before you can start weighing, press the UNIT button to convert units.
5. Place the item on the weighing body (or on the carrier plate) for weighing, the LCD display weight.

5. Automatic shutdown

(Power saving mode) products factory preset in 3 minutes static situation automatic shutdown, can be the product shutdown time of 3 modes set to 3 minutes, 10 minutes, do not automatically shut down (need to press the key to turn off the shutdown).

Setup method

In the shutdown of the state, with one hand according to the unit key does not loosen the case, and then with the other use of the switch key to boot, after the boot display will display the current set shutdown time, and then can be the general unit key to modify the settings, modified after pressing the SWITCH button to confirm.

Precautions

1. 1. Before use, please place the product on a solid flat desktop operation, do not have strong winds blowing the electronic scales (such as fans), do not be placed on the cushion operation, and keep their feet on the desktop.
2. 2. Do not place this product in wet, high-heat and low-cold places to use.
3. 3. This product is a high-precision electronic products, please do not slap vigorously on the instrument, move to prevent drop damage.
4. 4. When the item is dirty, wipe clean with water. Do not use chemical agents and prevent the wate into the scale body from the bottom.
5. 5. If you don't use it for a long time, please take the batteries off, to prevent the corrosion of the electronic scale caused by the battery fluid leak.
6. 6. If the monitor displays the LO that it indicate the power is too low, please charge the electronic scale in time or replace the batteries. While charging the built-in lithium battery, please be sure to remove the batteries.
7. 7. When the monitor displays ERR, please remove that to avoid damage to the item.

FAQ

Did not turn on and it cannot connect the power.

You can check whether the product has the batteries or the batteries is loaded reverse. Charging products can be directly connected to the charging line charging test.

No return to zero.

You can take the batteries off and reinstall it. When the item reinstall the batteries, it can adjustment by itself. Or you can check it that whether the feet of the item are on a flat, hard desktop or nor.

The product has a digital instability after it has been zeroed.

If the first time to after the boot, you can press Clear 0 /Except Plan to clear zero. While it was happens repeatedly, you need to remove the batteries and reinstall it. you also can check it that whether the feet of the item are on a flat, hard desktop or nor.

After using a period of time, the display brightness drops

After a period of use of the product, the battery will be reduced, this time as long as there is no low power prompt character, the product can be used, However, you need to replace the battery as soon as possible or with the charging cable need to charge. To ensure that the product is fully charged.

Weighing is not correct enough, repeatedly called an item will appear different values.

This item is a measurement product and there will be a certain reasonable error range. It can be used normally as long as the error does not exceed the specification error range.

hëndig

ELECTRONIC KITCHEN SCALE

INSTRUCTION MANUAL



Before using this product, please read this manual carefully and keep it for future reference. (the pictures are for reference only and be subject to the actual product.)

Features

1. High precision sensor.
2. LCD high-definition display
3. Automatic turn-off
4. Overload prompts
5. With unit switch
6. With peeling function and overload protection.
7. Can be used for charging or batteries, dual power supply mode

Basic Characteristic

- Product Name: Charging Digital Kitchen Scale
- Power Supply: 2*AAA batteries
- Range:5kg/10kg/15kg
- Accuracy: 1G
- Error range: 3%+1G

Instructions

1. Battery and Battery Installation

(2) Power supply using battery: After placing 2 AAA batteries, the scale will give priority to using the AAA battery to supply power to the electronic scale.

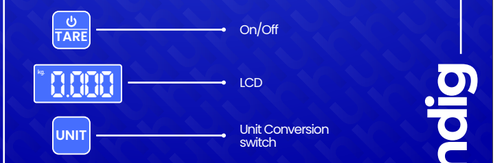

hëndig

Button Description

Z/T ON/OFF Tare /Clear switch
Unit Conversion Switch



ON/OFF

1. The button of the SWITCH can be used to start and shut down operation. It can be turned on by pressing the "switch" button lightly in the shutdown state and turn off by pressing the SWITCH button lightly 2-3s in the boot state.



Z/T

1. ZERO key, put the tray under the scale (if there is a tray)
2. Press the Return to Zero button to remove the weigh of the tray.
3. The scale can be aggravated and measured only after the display is returned to zero.



UNIT

1. This product has a variety of units for users to choose, press the "Unit" button to cycle selection.
2. As shown in Figure





Weighing Description

1. Please place the electronic scale on a hard horizontal surface and operate in an operating environment where strong winds cannot be blown (such as a fan).
2. Place the carrier tray on the scale body.
3. Press the SWITCH button to boot.
4. Wait for 0 to appear before you can start weighing, press the UNIT button to convert units.
5. Place the item on the weighing body (or on the carrier plate) for weighing, the LCD display weight.

5. Automatic shutdown

(Power saving mode) products factory preset in 3 minutes static situation automatic shutdown, can be the product shutdown time of 3 modes set to 3 minutes, 10 minutes, do not automatically shut down (need to press the key to turn off the shutdown).

Setup method

In the shutdown of the state, with one hand according to the unit key does not loosen the case, and then with the other use of the switch key to boot, after the boot display will display the current set shutdown time, and then can be the general unit key to modify the settings, modified after pressing the SWITCH button to confirm.

Precautions

1. 1. Before use, please place the product on a solid flat desktop operation, do not have strong winds blowing the electronic scales (such as fans), do not be placed on the cushion operation, and keep their feet on the desktop.
2. 2. Do not place this product in wet, high-heat and low-cold places to use.
3. 3. This product is a high-precision electronic products, please do not slap vigorously on the instrument, move to prevent drop damage.
4. 4. When the item is dirty, wipe clean with water. Do not use chemical agents and prevent the wate into the scale body from the bottom.
5. 5. If you don't use it for a long time, please take the batteries off, to prevent the corrosion of the electronic scale caused by the battery fluid leak.
6. 6. If the monitor displays the LO that it indicate the power is too low, please charge the electronic scale in time or replace the batteries. While charging the built-in lithium battery, please be sure to remove the batteries.
7. 7. When the monitor displays ERR, please remove that to avoid damage to the item.

FAQ

Did not turn on and it cannot connect the power.
You can check whether the product has the batteries or the batteries is loaded reverse. Charging products can be directly connected to the charging line charging test.
No return to zero.
You can take the batteries off and reinstall it. When the item reinstall the batteries, it can adjustment by itself. Or you can check it that whether the feet of the item are on a flat, hard desktop or nor.
The product has a digital instability after it has been zeroed.
If the first time to after the boot, you can press Clear 0 /Except Plan to clear zero. While it was happens repeatedly, you need to remove the batteries and reinstall it. you also can check it that whether the feet of the item are on a flat, hard desktop or nor.
After using a period of time, the display brightness drops
After a period of use of the product, the battery will be reduced, this time as long as there is no low power prompt character, the product can be used, However, you need to replace the battery as soon as possible or with the charging cable need to charge. To ensure that the product is fully charged.
Weighing is not correct enough, repeatedly called an item will appear different values.
This item is a measurement product and there will be a certain reasonable error range. It can be used normally as long as the error does not exceed the specification error range.

hëndig

ELECTRONIC KITCHEN SCALE

INSTRUCTION MANUAL



Before using this product, please read this manual carefully and keep it for future reference. (the pictures are for reference only and be subject to the actual product.)

Features

1. High precision sensor.
2. LCD high-definition display
3. Automatic turn-off
4. Overload prompts
5. With unit switch
6. With peeling function and overload protection.
7. Can be used for charging or batteries, dual power supply mode

Basic Characteristic

- Product Name: Charging Digital Kitchen Scale
- Power Supply: 2*AAA batteries
- Range:5kg/10kg/15kg
- Accuracy: 1G
- Error range: 3%+1G

Instructions

1. Battery and Battery Installation

(2) Power supply using battery: After placing 2 AAA batteries, the scale will give priority to using the AAA battery to supply power to the electronic scale.

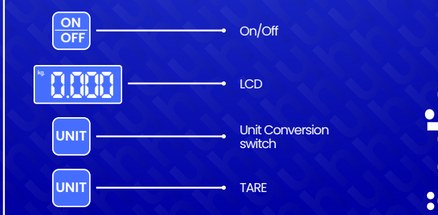

hëndig

Button Description

Z/T ON/OFF Tare /Clear switch
Unit Conversion Switch





ON/OFF

1. The button of the SWITCH can be used to start and shut down operation. It can be turned on by pressing the "switch" button lightly in the shutdown state and turn off by pressing the SWITCH button lightly 2-3s in the boot state.



Z/T

1. ZERO key, put the tray under the scale (if there is a tray)
2. Press the Return to Zero button to remove the weigh of the tray.
3. The scale can be aggravated and measured only after the display is returned to zero.



UNIT

1. This product has a variety of units for users to choose, press the "Unit" button to cycle selection.
2. As shown in Figure





Weighing Description

1. Please place the electronic scale on a hard horizontal surface and operate in an operating environment where strong winds cannot be blown (such as a fan).
2. Place the carrier tray on the scale body.
3. Press the SWITCH button to boot.
4. Wait for 0 to appear before you can start weighing, press the UNIT button to convert units.
5. Place the item on the weighing body (or on the carrier plate) for weighing, the LCD display weight.

5. Automatic shutdown

(Power saving mode) products factory preset in 3 minutes static situation automatic shutdown, can be the product shutdown time of 3 modes set to 3 minutes, 10 minutes, do not automatically shut down (need to press the key to turn off the shutdown).

Setup method

In the shutdown of the state, with one hand according to the unit key does not loosen the case, and then with the other use of the switch key to boot, after the boot display will display the current set shutdown time, and then can be the general unit key to modify the settings, modified after pressing the SWITCH button to confirm.

Precautions

1. 1. Before use, please place the product on a solid flat desktop operation, do not have strong winds blowing the electronic scales (such as fans), do not be placed on the cushion operation, and keep their feet on the desktop.
2. 2. Do not place this product in wet, high-heat and low-cold places to use.
3. 3. This product is a high-precision electronic products, please do not slap vigorously on the instrument, move to prevent drop damage.
4. 4. When the item is dirty, wipe clean with water. Do not use chemical agents and prevent the wate into the scale body from the bottom.
5. 5. If you don't use it for a long time, please take the batteries off, to prevent the corrosion of the electronic scale caused by the battery fluid leak.
6. 6. If the monitor displays the LO that it indicate the power is too low, please charge the electronic scale in time or replace the batteries. While charging the built-in lithium battery, please be sure to remove the batteries.
7. 7. When the monitor displays ERR, please remove that to avoid damage to the item.

FAQ

Did not turn on and it cannot connect the power.

You can check whether the product has the batteries or the batteries is loaded reverse. Charging products can be directly connected to the charging line charging test.

No return to zero.

You can take the batteries off and reinstall it. When the item reinstall the batteries, it can adjustment by itself. Or you can check it that whether the feet of the item are on a flat, hard desktop or nor.

The product has a digital instability after it has been zeroed.

If the first time to after the boot, you can press Clear 0 /Except Plan to clear zero. While it was happens repeatedly, you need to remove the batteries and reinstall it. you also can check it that whether the feet of the item are on a flat, hard desktop or nor.

After using a period of time, the display brightness drops

After a period of use of the product, the battery will be reduced, this time as long as there is no low power prompt character, the product can be used, However, you need to replace the battery as soon as possible or with the charging cable need to charge. To ensure that the product is fully charged.

Weighing is not correct enough, repeatedly called an item will appear different values.

This item is a measurement product and there will be a certain reasonable error range. It can be used normally as long as the error does not exceed the specification error range.