




Connect Flooring

REMOTE CONTROLLED RETRACTABLE CEILING STORAGE RACK


INSTRUCTION MANUAL

PARTS LISTS

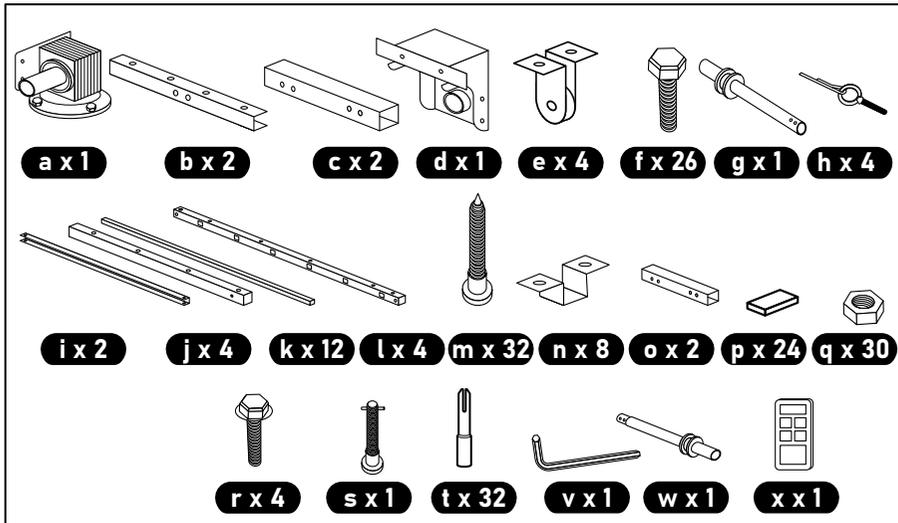

DESCRIPTION


Transform your garage with the Retractable Ceiling Storage Rack. This innovative solution effortlessly lowers and raises from your ceiling, providing heavy-duty storage for up to 315kgs. Designed to maximise space and keep your items within easy reach, it's ideal for organising your garage efficiently without needing your ladder.

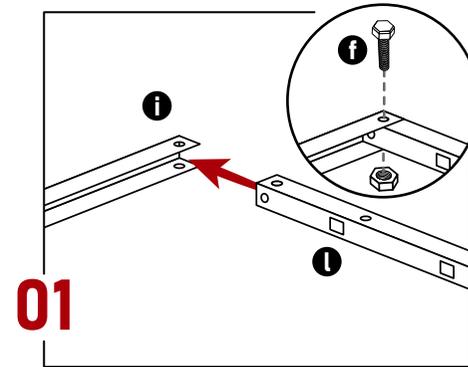

01

Assemble the Base


Position the side rails and attach them securely using the provided nuts. Ensure each side is aligned before tightening.

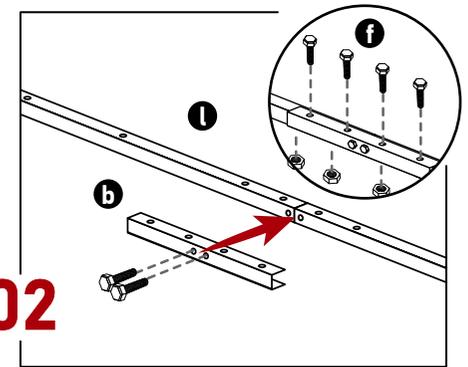

02

Connect Both Sides


Insert the connector between both side frames and fasten it with nuts. Make sure the structure feels firm and stable.

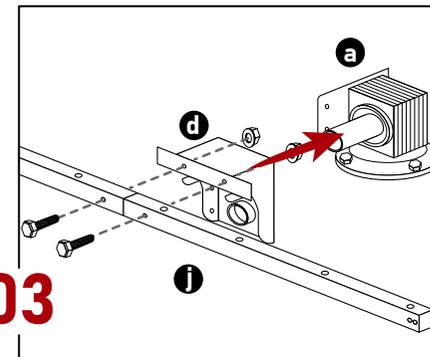

03

Attach the Top Rails

Connect the top rails by inserting the bolts. Once aligned, attach the roller and connect it with the remote control device.

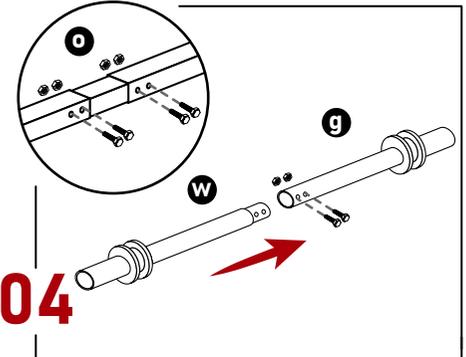

04

Install the Bridge and Rollers

Connect the top bridge using the connector piece. Attach the center cord rollers and confirm that the cord runs smoothly through each roller.




sales@connectflooring.com.au



www.connectflooring.com.au




0476 012 911

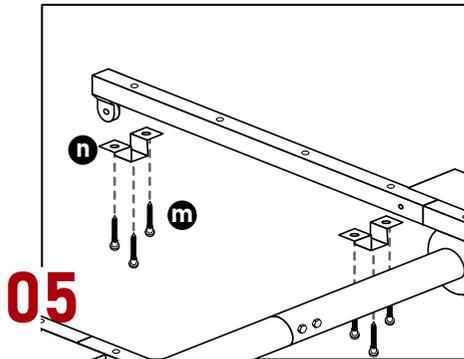

05

Join the Top Structure with the Storage Base


Position the storage base beneath the top structure. Use the cord integrated screws located in the four corners and tighten them securely to lock the structure in place.

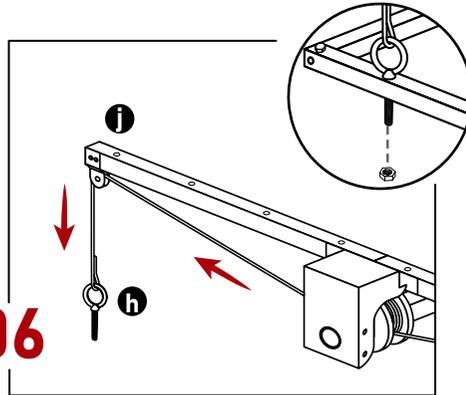

06

Install on the Ceiling

Mark the ceiling positions for drilling. Attach the structure firmly to the roof using the mounting hardware. Confirm the rack is level and stable before use.

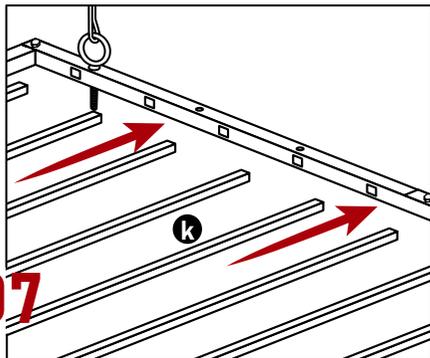

07

Strengthen the Base

Install the reinforcing bars in the center section of the base. This strengthens the load support and ensures stable operation.

WARNING

- Install only on ceilings that can support the combined weight of the rack plus the load you intend to store.
- Do not exceed the maximum weight capacity of 315 kg.
- Ensure all screws and bolts are fully tightened before operating the rack.
- Keep all small hardware away from children.
- Do not stand under the rack while it is moving.
- Inspect cables, rollers, and joints regularly for signs of wear.
- Do not install the product near electrical wires, water pipes, or fire sprinklers.
- Operate the remote control with a clear line of sight and avoid sudden or jerky movements.


CARE INSTRUCTIONS

- Clean the structure with a soft damp cloth only. Do not use abrasive cleaners.
- Check bolts, screws, and cable tension every 30 days.
- Lubricate roller components lightly if movement becomes stiff.
- Keep the system indoors and protect it from moisture or direct water contact.
- Do not overload or store sharp or unstable items on the rack.
- Replace any worn or damaged parts immediately to maintain safe operation.

For more details or assistance, reach out to our support team at sales@connectflooring.com.au or call **0476 012 911**



Connect Flooring

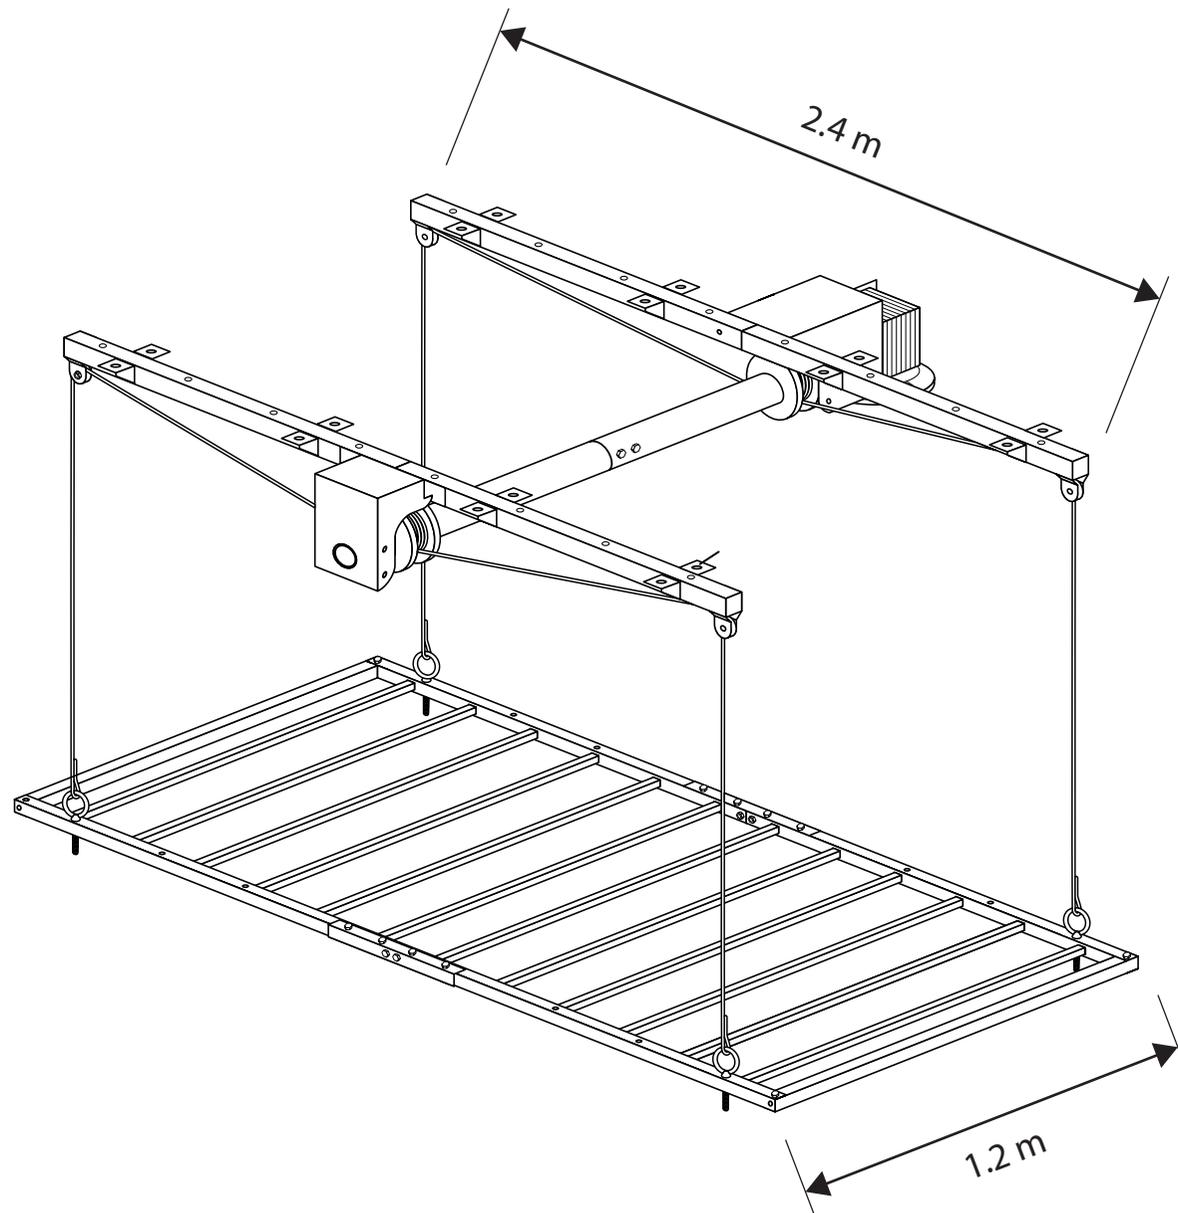

FEATURES:

- Easy Installation
- All mounting hardware included
- Manufactured with premium grade steel
- Rated up to 315kgs
- 5 Year Warranty



sales@connectflooring.com.au



www.connectflooring.com.au



0476 012 911